
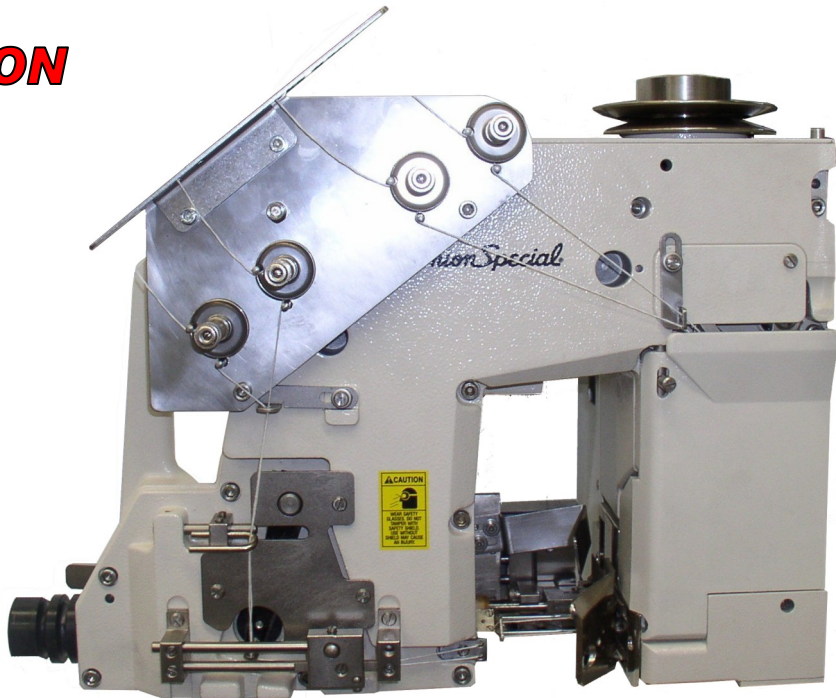


Introducing the better choice . . .
with vertical acting presser foot system and
rust protected parts

NEW GENERATION

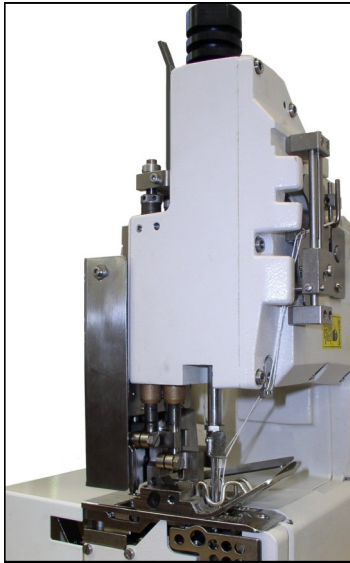

. . . in bag closing

High speed and high performance two needle independent row double locked chainstitch bag closing machine for closing filled bags.

Internal forced lubrication system in closed shell design casting. Low noise and vibration.

Needle distance:	7.2 mm
Needles are staggered:	7.2 mm, front needle below
Start-Stop:	automatically by feeler controlled proximity switch
Control voltage:	24 V DC
Thread chain trimming:	automatically by an "advanced "electro-pneumatically operated guillotine
Maximum speed:	up to 2500 stitches / min., depending on material and sewing operation
Stitch type:	(401.401)
Capacity under guillotine:	9.5 mm
Stitch length:	6.5 -12.5 mm, standard setting 10 mm
Sewing capacity on paper bags:	up to 32 plies of paper depending on weight of paper

Benefits:

- **Independently adjustable chaining and pressure foot pressure for optimized bag feeding**
- **Protection against rust.**
- High production: up to 40 bags of 50 kg per minute with a linear sewing speed up to 30 m/min. depending on stitch length, operation and material.
- Longer part life
- Easy and quick sewing speed adjustment
- Easily set a loose or tight seam as needed
- Simplified maintenance

Subject to change without notice © Union Special GmbH

● EFFICIENT
 ● RELIABLE
 ● STURDY